



MBRB10100CT thru MBRB10200CT

10.0A Schottky Barrier Rectifiers

Rectifier Reverse Voltage 100 to 200V


TO-263

Features

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 260 °C max. 8 s, per JESD 22-B106

Mechanical Data

- **Package:** TO-220AB
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

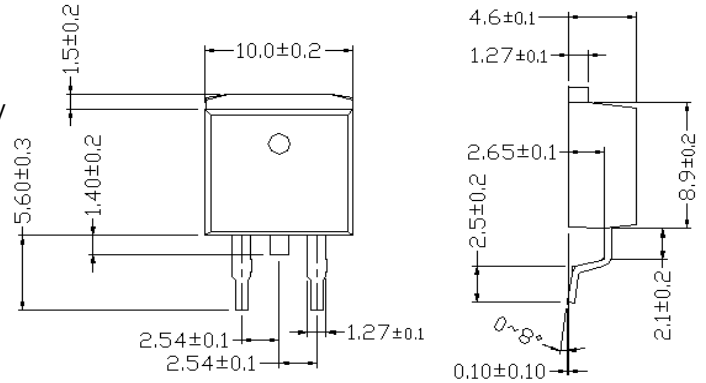

Dimensions in millimeters (1mm =0.0394")

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRB10100CT	MBRB10150CT	MBRB10200CT
Device marking code			MBRB10100CT	MBRB10150CT	MBRB10200CT
Repetitive Peak Reverse Voltage	V _{RRM}	V	100	150	200
Average Rectified Output Current @60Hz sine wave, R-load, T _a =25°C	I _O	A	10		
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _a =25°C	I _{FSM}	A	90		
Current Squared Time @1ms≤t<8.3ms T _j =25°C ,	I ² t	A ² s	33.6		
Storage Temperature	T _{stg}	°C	-55 ~ +175		
Junction Temperature	T _j	°C	-55 ~ +150		

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	TEST CONDITIONS	MBRB10100CT	MBRB10150CT	MBRB10200CT
Maximum instantaneous forward voltage drop per diode		V _{FM}	V	I _{FM} =5.0A	0.85	0.90	0.92
Maximum DC reverse current at rated DC blocking voltage per diode		I _{RRM1}	mA	V _{RM} =V _{RRM} T _a =25°C	0.1	0.05	
		I _{RRM2}		V _{RM} =V _{RRM} T _a =125°C	20		
Thermal Resistance	Between junction and case	R _{θJ-C}	°C/W		2.0		

Rating and Characteristic Curves ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

MBRB10100CT thru MBRB10200CT

FIG1: I_o - T_c Curve

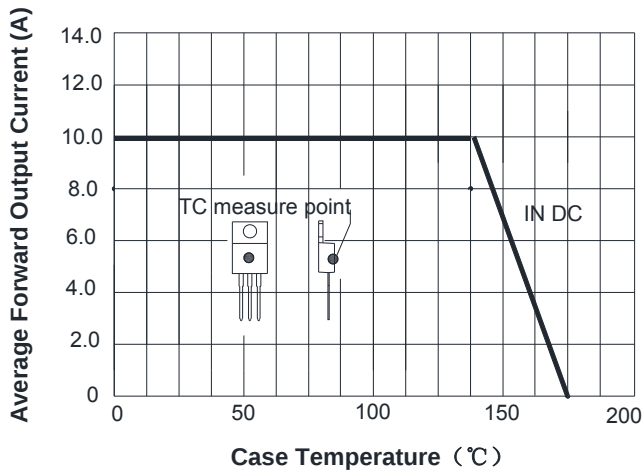


FIG2: Surge Forward Current Capability

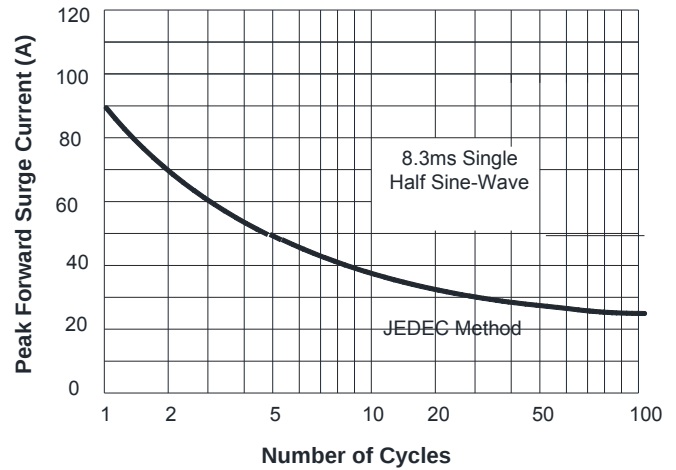


FIG3: Forward Voltage

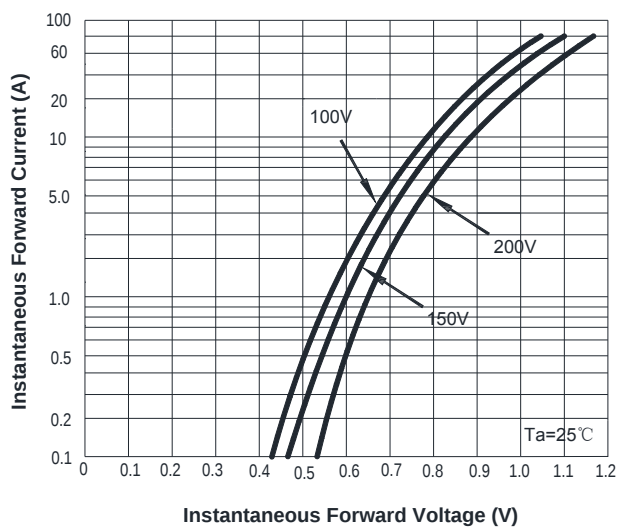


FIG4: Instantaneous Reverse Characteristics

