




Transient Voltage Suppressors for ESD Protection

Low Capacitance

Feature


- ◆ Ultra small package: 1.6x1.0x0.5mm
- ◆ Protects one data or power line
- ◆ Working Voltage: 7V
- ◆ Low clamping voltage
- ◆ 2-pin leadless package
- ◆ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
Air discharge: $\pm 30\text{kV}$; Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-5 (Lightning) 100A (8/20 μs)
- ◆ RoHS Compliant

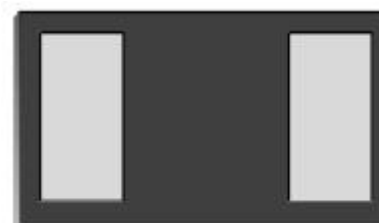DFN1610-2L

Applications

- ◆ Laptop Computers
- ◆ Cellular Phones
- ◆ Digital Cameras
- ◆ Personal Digital Assistants

Pin Configuration

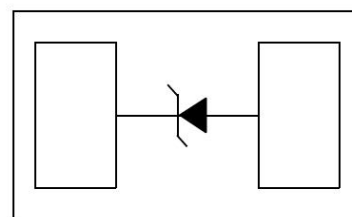

Mechanical Characteristics

- ◆ Package: DFN1610-2L
- ◆ Case Material: "Green" Molding Compound.
- ◆ Moisture Sensitivity: Level 1 per J-STD-020
- ◆ Packaging: 3000 PCS / Tape & Reel
- ◆ Reel Size: 7 inch

Absolute Maximum Ratings (TA=25 °C unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Current (8/20 μs)	I_{PP}	100	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 30 ± 30	KV
Operating Temperature Range	T_{OP}	-40 to +125	°C
Storage Temperature Range	T_{STG}	-40 to +125	°C

Transient Voltage Suppressors for ESD Protection

SE07N9P11GJ

Low Capacitance

Electrical Characteristics (T_A= 25 ° unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Working Voltage	V _{RWM}	--	--	--	7	V
Breakdown Voltage	V _{BR}	I _T =1mA	7.2	8.4	--	V
Reverse Leakage Current	I _R	V _{RWM} =7V	--	--	0.5	μA
Clamping Voltage	V _C	I _{PP} =1A (8 x 20μs pulse)	--	--	11	V
Clamping Voltage	V _C	I _{PP} =100A (8 x 20μs pulse)	--	30	--	V
Junction Capacitance	C _J	V _R =0V, f=1Mhz	--	750	--	pF

Ratings and V-I Curve Characteristics Curves (T_A=25 °, unless otherwise noted)

Fig1. Peak Pulse Power vs. Pulse Time

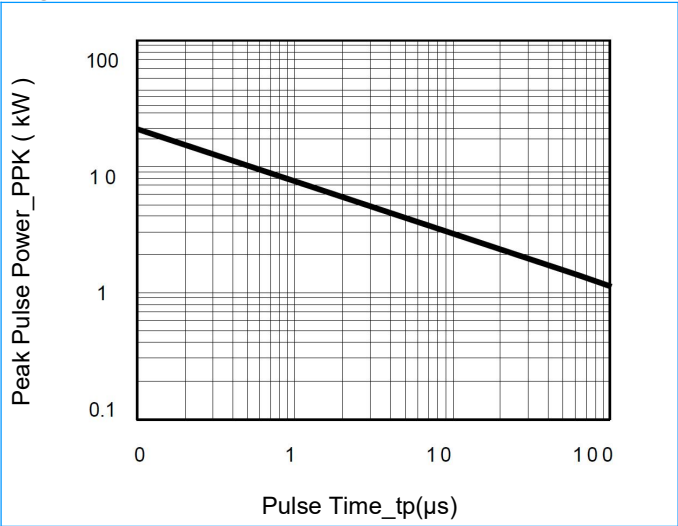


Fig2. Power Derating Curve


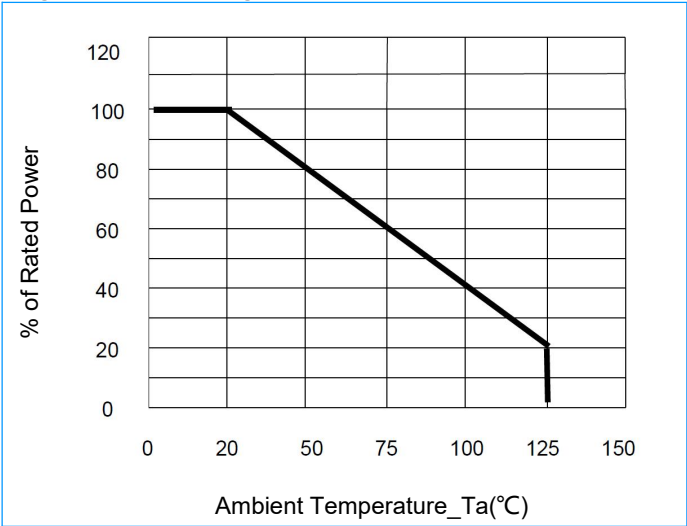



Fig3. 8/20 μ s Pulse Waveform

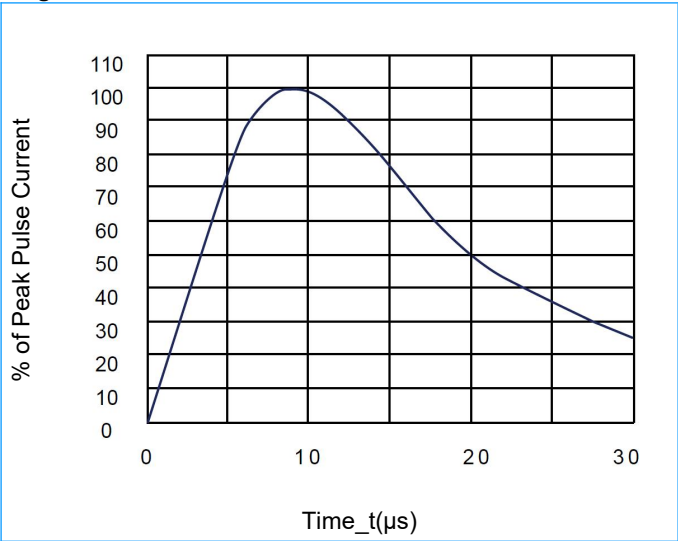

Transient Voltage Suppressors for ESD Protection
SE07N9P11GJ


Low Capacitance

DFN1610-2L Package Outline Drawing

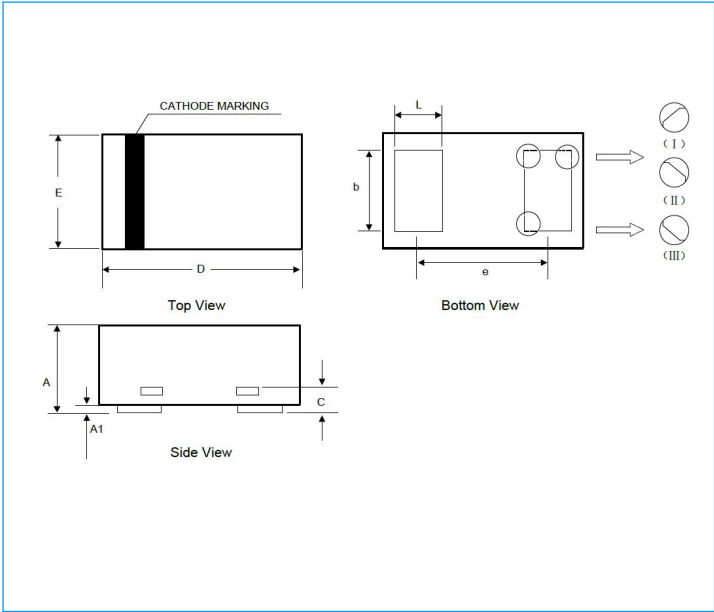

Symbol	Millimeters			Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	--	0.02	0.05	--	0.001	0.002
b	0.75	0.80	0.85	0.030	0.032	0.034
c	0.10	0.15	0.20	0.004	0.006	0.008
D	1.55	1.60	1.65	0.062	0.064	0.066
e	1.10 BSC			0.044 BSC		
E	0.95	1.00	1.05	0.038	0.040	0.042
L	0.35	0.40	0.45	0.014	0.016	0.018

Suggested Land Pattern

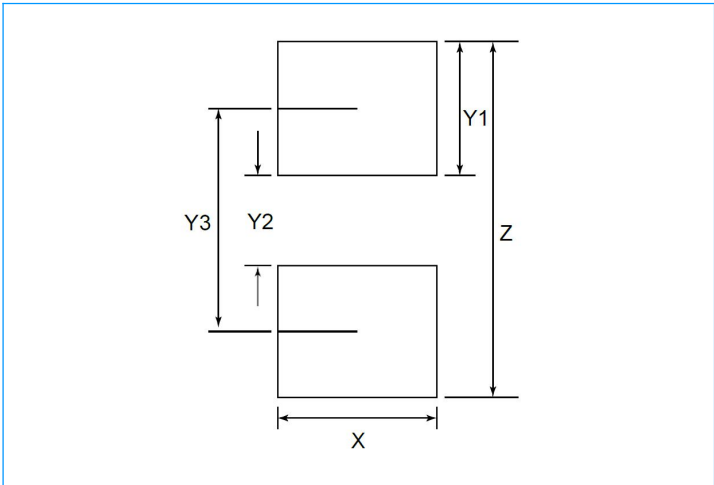

Symbol	Dimensions	
	Millimeters	Inches
X	1.00	0.040
Y1	0.62	0.025
Y2	0.60	0.024
Y3	1.22	0.049
Z	1.85	0.074