




Transient Voltage Suppressors for ESD Protection

Features

- ◆ Working voltage : 3.3V
- ◆ Low leakage current: 1.0 μ A @ V_{RWM}
- ◆ Low clamping voltage
- ◆ Response Time is < 1 ns


SOD-323



Applications

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Personal Digital Assistants (PDA's)
- ◆ Notebooks, Desktops, and Servers

Pin Configuration



Mechanical Characteristics

- ◆ SOD-323 Package
- ◆ Molding Compound Flammability Rating : UL 94V-0
- ◆ Quantity Per Reel : 3,000pcs
- ◆ Reel Size : 7 inch

Absolute Maximum Rating


Symbol	Parameter	Value	Units
T_{LST}	Lead Soldering Temperature	260 (10sec)	$^{\circ}$ C
T_{STG}	Storage Temperature Range	-55 to +125	$^{\circ}$ C
T_{OPT}	Operating Temperature Range	-55 to +125	$^{\circ}$ C
V_{ESD}	ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2 (Contact)	± 32 ± 16	KV

Transient Voltage Suppressors for ESD Protection

SE03D3V31GZ

I-V Curve Characteristics

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

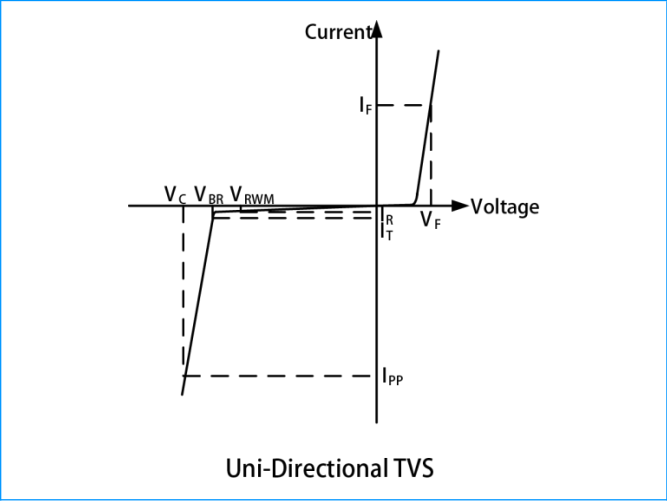

Electrical Characteristics (@T_A=25 °C Unless Otherwise Specified)

Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}	--	--	--	3.3	V
I_R	$V_{RWM}=3.3V, T=25^{\circ}C$	--	--	1.0	μA
V_{BR}	$I_T = 1mA$	5.2	--	6.2	V
V_C	$I_{PP}=13A, t_p=8/20\mu s$	--	12	--	V
C_J	$V_R=0V, f=1MHz$	--	90	--	pF

Characteristic Curves

Fig1. Peak Pulse Power vs. Pulse Time


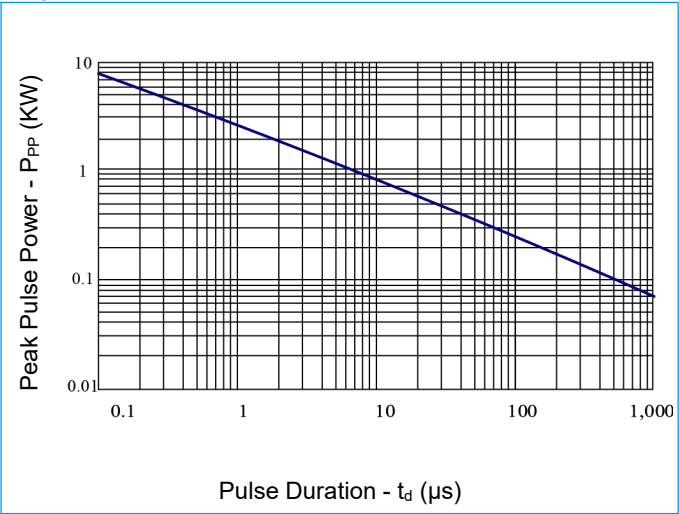


Fig2. Power Derating Curve

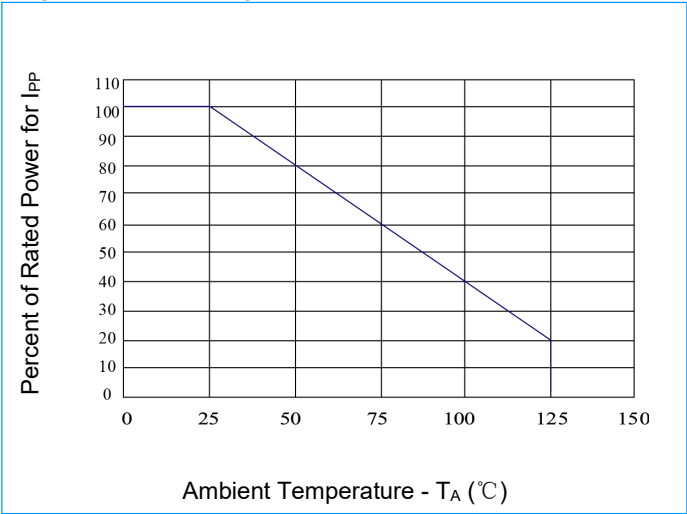

Transient Voltage Suppressors for ESD Protection

SE03D3V31GZ

Characteristic Curves (Continue)

Fig3. Clamping Voltage vs. Peak Pulse Current

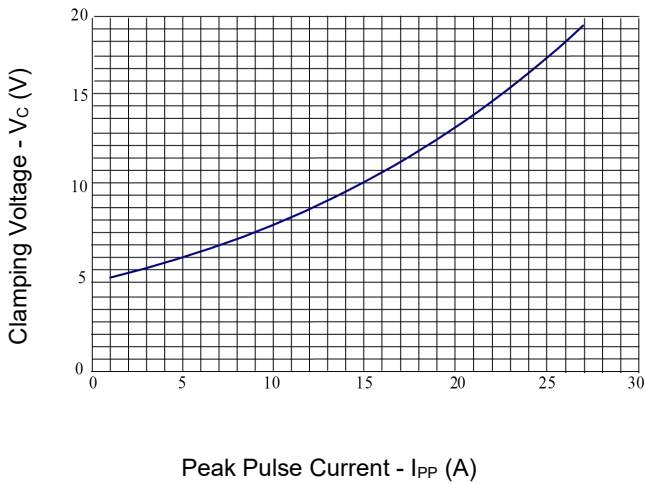


Fig4. Normalized Junction Capacitance vs. Reverse Voltage


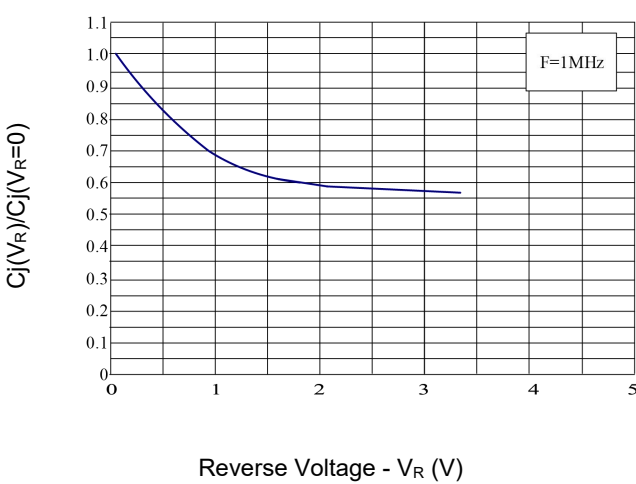



Fig5. Pulse Waveform Current

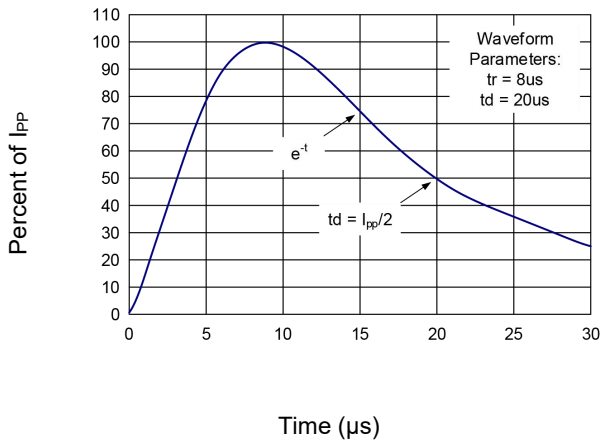

Transient Voltage Suppressors for ESD Protection

SE03D3V31GZ

SOD-323 Package Outline & Dimensions

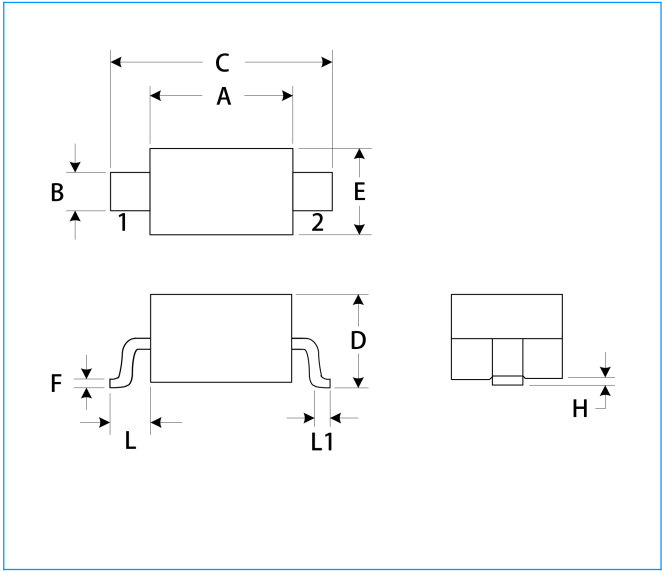

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.600	1.800	0.063	0.071
B	0.250	0.350	0.010	0.014
C	2.500	2.700	0.098	0.106
D	--	1.000	--	0.039
E	1.200	1.400	0.047	0.055
F	0.080	0.150	0.003	0.006
L	0.475 REF.		0.019 REF.	
L1	0.250	0.400	0.010	0.016
H	0.000	0.100	0.000	0.004